


CSUN295-72M

Highest Module Efficiency: 15.75%

Our standard modules are designed, developed and manufactured for both residential and commercial, rooftop and ground-mounted, as well as on-grid and off-grid photovoltaic projects.

Quality of our products is the reason of CSUN's life. We select the best raw materials and conduct regular testing to ensure that they can meet our rigorous quality standards. Every module has been tested before delivery to make sure the efficiency tolerance is in a narrow range. Each link is strictly controlled to ensure the benefit of our customers.

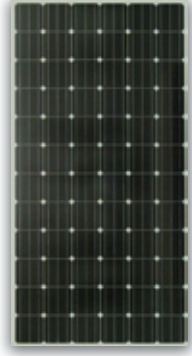

Features

- 72 High-Efficiency Monocrystalline Solar Cells;
- Passing mechanical load test of 5400Pa according to IEC 61215(advanced test);
- Tested to withstand hails with maximum diameter of 25mm with impact speed of 23m/s;
- The high-transparency low-iron tempered glass allows maximum light permeability while enhancing stiffness and impact resistance;
- Integrated bypass diodes to protect the solar cell circuit from hot spots during partial shading;
- Our module technology avoids any problems of water freezing and warping;
- Low power tolerance of $\pm 3\%$;
- Black backsheet is also available.

Quality and Certificates

- 5-year hardware warranty;
- 25-year power output warranty.*
- Certifications:

Certification Authority	Test Standard		Power Range
TÜV Rheinland	IEC61215	IEC61730	255W-305W
TÜV InterCert	IEC61215	IEC61730	255W-305W
UL	UL1703		255W-295W
Intertek	UL1703		245W-300W
CEC	IEC61215	UL1703	265W-300W
FSEC	IEC61215	UL1703	245W-300W
MCS	IEC61215	IEC61730	255W-305W



* 12 year at 90% of the minimal rated power output, 20 year at 83%, and 25 year at 80%.

Specifications



Type	305-72M	300-72M	295-72M	290-72M	285-72M
Peak Power (Pmpp)	305	300	295	290	285
Open Circuit Voltage (Voc)	44.9	44.8	44.6	44.5	44.4
Short Circuit Current (Isc)	8.87	8.80	8.73	8.67	8.60
Optimum operating Voltage (Vmpp)	36.2	36.1	35.9	35.8	35.7
Optimum operating Current (Impp)	8.43	8.32	8.22	8.11	7.99
Module efficiency	15.75%	15.49%	15.23%	14.98%	14.72%
Maximum system voltage [V]	1000				
Voltage temperature coefficient	-0.307%/K				
Current temperature coefficient	+0.039%/K				
Power temperature coefficient	-0.423%/K				
Series fuse rating[A]	15				
Cells	6×12 pieces monocrystalline solar cells series strings 156mm×156mm (6inch)				
Junction box	with 6 bypass diodes				
Cable	length 900 mm (35.4inch), 1×4 mm ² (0.16in ²)				
Front glass	white toughened safety glass, 3.2 mm				
Cell encapsulation	EVA (Ethylene-Vinyl-Acetate)				
Back sheet	composite film				
Frame	anodised aluminium profile				
Dimensions	1956×990×50mm (L×W×H) [76.98×38.98×1.97inch]				
Weight	23.8kg (52.4lbs)				

The electrical data relates to standard test conditions [STC]: 1,000 W/m²; AM 1.5; 25°C.
Performance deviation of P_{mp}: ± 3%; Performance deviation of V_{oc}, I_{sc}, V_{mp} and I_{mp}: ± 10%.
Certified in accordance with IEC61215, IEC61730-1/2 and UL1703.

Operating Condition & Packaging

Maximum surface load capacity	tested up to 5,400 Pa according to IEC 61215			
Hail	maximum diameter of 25 mm with impact speed of 23m/s (51.2mph)			
Temperature range	- 40 °C to + 85 °C			
Dimensions(L×W×H)	Container 20'	Container20'HC	Container40'	Container40'HC
1956×990×50mm	200	215	480	516

IV-Curves



Dimensions

